DATA SHEET

KH 24-50LFP

24V 50Ah LiFePO4 LITHIUM BATERY

Crafted out of Lithium Iron Phosphate (LiFePO4) technology, this is a battery built to last. With 2,000+ recharge cycles (and up to 7,000 under ideal charging conditions) the 100 Ah provides 5 X the lifespan than your typical SLA battery.Ideal for industrial purposes where you need a long lifespan battery that charges quickly, or for outdoor uses like hiking or camping where weight is at a premium. Built in smart BMS, which can realize Bluetooth function and battery level display optional.

SPECIFICATIONS

Nominal Voltage	25.6V
Rated Capacity	50AH @0.2C to 9.6V
Stored energy	1280Wh
Cycle life@100%DOD	2000 Cycles
Approx. Weight	11kg
Internal Resistance	≪30.0 m Ω
Max. Charge Current	50 A
Max. Discharge Current	50 A
Charge Cut-off Voltage	14.6V
Discharge Cut-Off Voltage	10.0V
Dimensions	L260mm $ imes$ W165mm $ imes$ H210mm
Series & Parallel Connection	Up to 4 batteries
Operating Temperature Range	
Charge	32°F (0°C) to 113°F (45°C)
Discharge	14°F (-10°C) to 140°F (60°C)
Recommended	59°F (15°C) to 95°F (35°C)
Self-Discharge Rate	≤3%/month
Life Expectancy (years)	10 years @25 $^{\circ}~$ C in 80%DOD
Self Discharge	Approx. 2% per month @ 25 $^{\circ}$ C
Long Term Storage	Charge every 6 months
Short Circuit Protection	Automatically recover after removal of short
Terminal Type	Female Copper Insert M8 (M8/mm)



COMPLIED STANDARD

- 1 IEC 62133
- 1 UL 1642
- 1 ISO9001
- ISO14001
- UN38.3

INTELLIGENT BMS FUNCTION

- Overcharge detection function >
- Over discharge detection function 2
- > Over current detection function
- > Short detection function
- Temperature detection function >
- **Balance** function

BLUETOOTH® ENABLED

Monitor the State of Charge (SoC), State of Health (SoH), current, capacity, temperature, number of cycles, and voltage levels of the battery and individual cells from APP.

APPLICATIONS


Medical	Solar	

Wind Mobility

```
Data Center
```

Transport


Sports & Recreation Utility

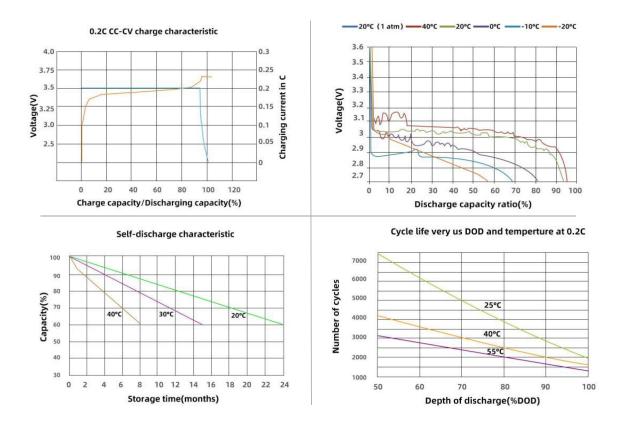

BENEFITS OF LITHIUM

Lithium offers several perormance benefits versus it's sealed lead acid (SLA) equivelant. A lithium battery's capacity is independent from the discharge rate and provides constant power throughout it's discharge. The degredation of a lithium battery at a high temperature is significantly reduced in comparison to SLA. Lithium has ten times the cycle life as SLA at room temperature. Even at an elevated temperature, lithium still has increased cycle life over SLA at room temperature.Lastly, Lithium charging follows a similar charging profile as SLA, Constant Current Constant Voltage (CC/CV). However, lithium can be charged faster, without the need for a maintenance float charge.

BATTERY DIMENSIONS

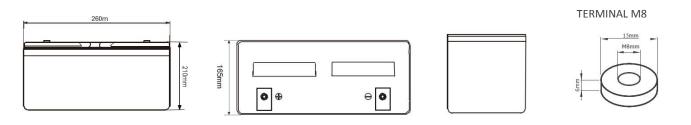

Shenzhen Heyuxin Technology Co., Ltd

2001, Building A, Zhongan Science Park, No. 117, Huaning Road, Xinshi Community, Dalang Street, Longhua Disctrict, Shenzhen, Guangdong

Website:www.hyxinbattery.com Email: contact@hyxinbattery.com

