

HYX-ESS48100PW1


POWER YOUR HOME WITH GREEN ENERGY



HYX-ESS48100PW1 is a 48V low voltage battery module that enables energy storage to maximise self-consumption from your solar system to reduce electricity bills and provide energy independence.

Suitable for residential or commercial solutions keeping you powered night and day.

Number of expandable battery units : up to 14units(10KWH\*14units=140KWH maximum)

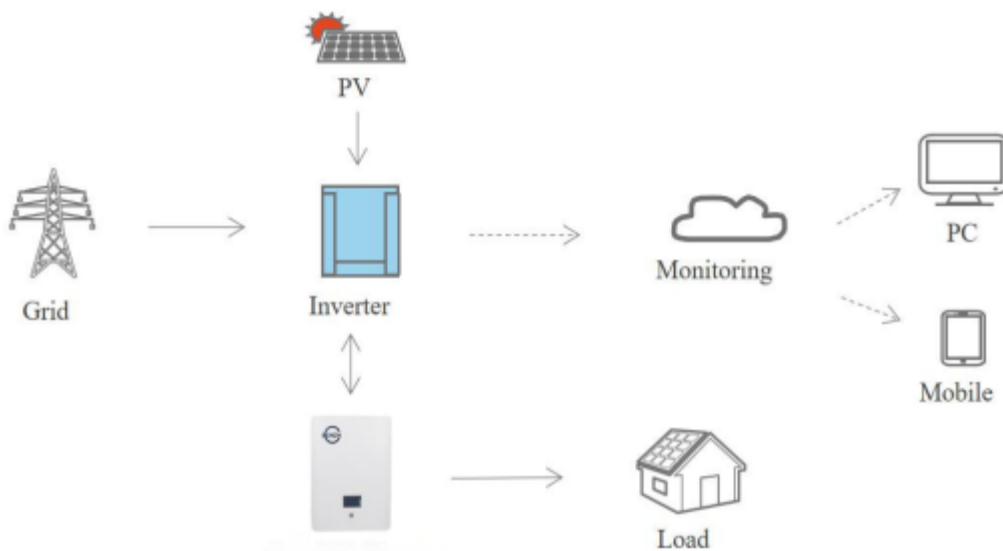


#### FEATURES

- 24-hour clean energy supplying
- 10 years designed lifespan
- Flexible design, easy to scale up
- Easy to wall mount
- Compact size and space saving


## SPECIFICATIONS

Nominal Voltage	51.2V
Rated Capacity	100AH @0.5C to 42V
Stored energy	5020Wh
Chemistry	LiFePO4
Life Expectancy (years)	10 years @ 25° C
Charge Cut-off Voltage	58.4V
Discharge Cut-Off Voltage	42V
Internal Resistance	≤70.0 mΩ
Max. Continuous charge Current	100 A
Max. Continuous discharge Current	100 A
Cycle life@100%DOD	>2000 Cycles@100%DOD >4000 Cycles@80%DOD >7000 Cycles@50%DOD
Self-Discharge Rate	≤3%/month @ 25° C
Battery Pack Round-Trip Efficiency	Up to 98%
Approx. Weight	60 kg
Dimensions	L420mm×W259mm×H700mm
Series & Parallel Connection	Maxium 14 units in parallel Connection
Operating Temperature Range	
Charge	32°F (0°C) to 113°F (45°C)
Discharge	-4°F (-20°C) to 140°F (60°C)
Storage	-4°F (-20°C) to 140°F (60°C)
Installation	Wall-mounted
Humidity Conditions	10% to 90%
Cooling method	Natural cooling
Installation	Wall-mounted
Installation Altitude(above sea level)	≤2,000m
Certification	CELL: UN38.3, UL1642, CE BATTERY: UN38.3, CE
Communication with BMS	RS485/CAN
Monitoring parameters	System Voltage System Current Cell Voltage Cell temperature


### CHARACTERISTIC CURVE

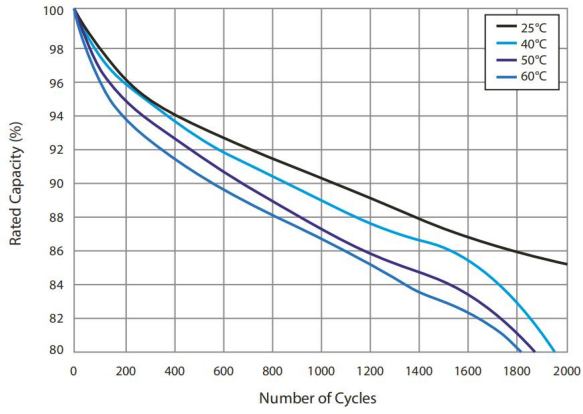


**100% DOD Cycle Curves at Different Temperatures**

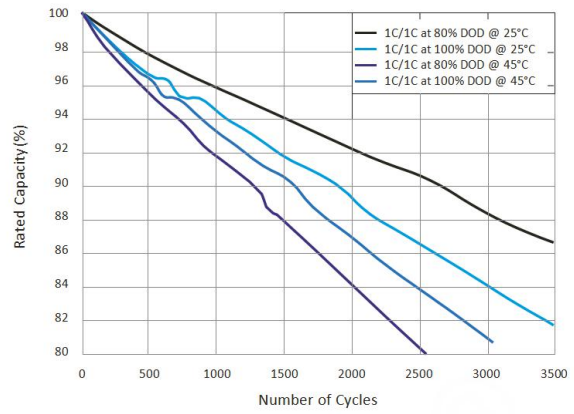


**1C Cycle Curves at Different DOD & Temperatures**

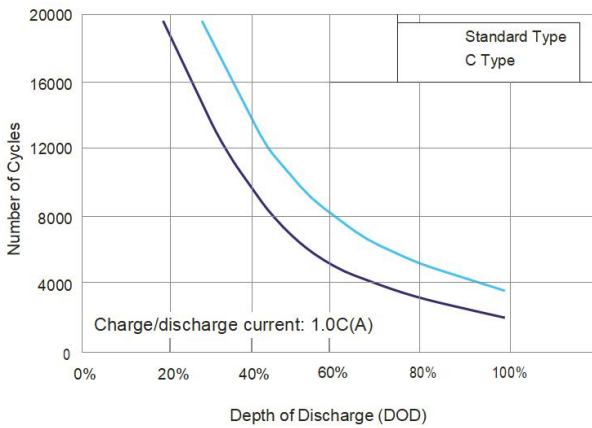


**DOD in Relation to Cycle Life (25°C)**

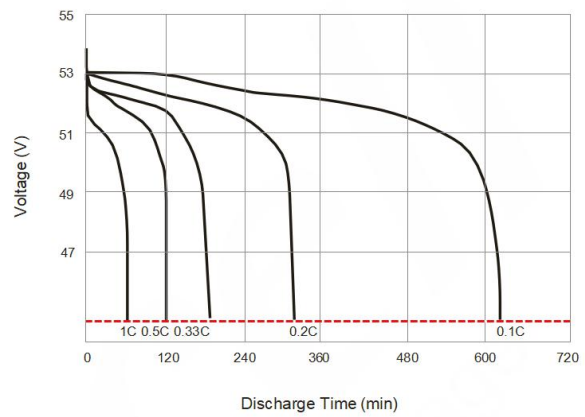

**Discharge Time in Relation to Discharge Rate (25°C)**

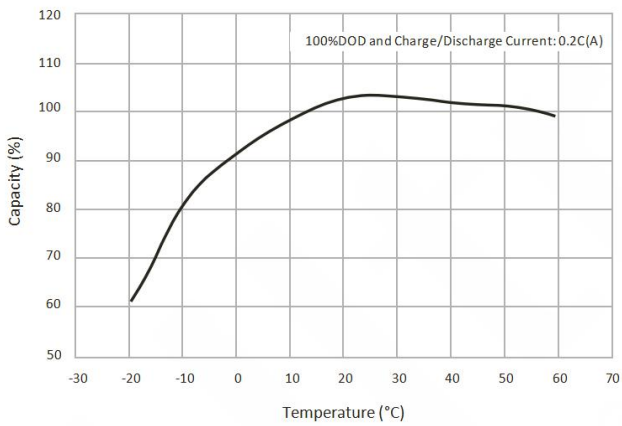

**Temperature Effect in Relation to Battery Capacity**

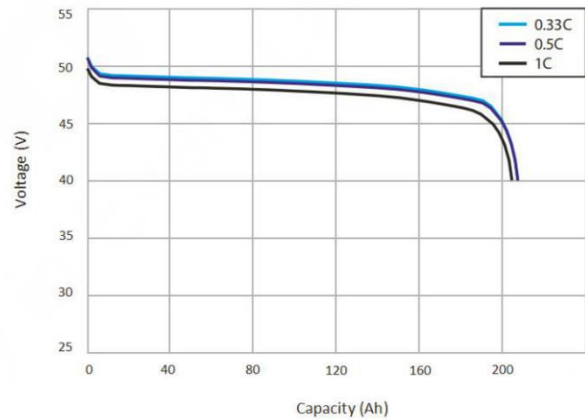

**Discharge Capacity in Relation to Discharge Rate**

## Shenzhen Heyuxin Technology Co., LTD

Address: 2001, Building A, Zhongan Science Park, No. 117, Huaning Road, Xinshi Community, Dalang Street, Longhua District, Shenzhen, Guangdong

Website: [www.hyxinbattery.com](http://www.hyxinbattery.com)  
Email: [contact@hyxinbattery.com](mailto:contact@hyxinbattery.com)

