


HYXBattery ESS All-in-one Battery

POWER YOUR HOME WITH GREEN ENERGY



HYXin 5kwh is a 48V low voltage battery module that enables energy storage to maximise self-consumption from your solar system to reduce electricity bills and provide energy independence. Suitable for residential or commercial solutions keeping you powered night and day.

Number of expandable battery units : up to 14units(5KWH*14units=70KWH maximum)

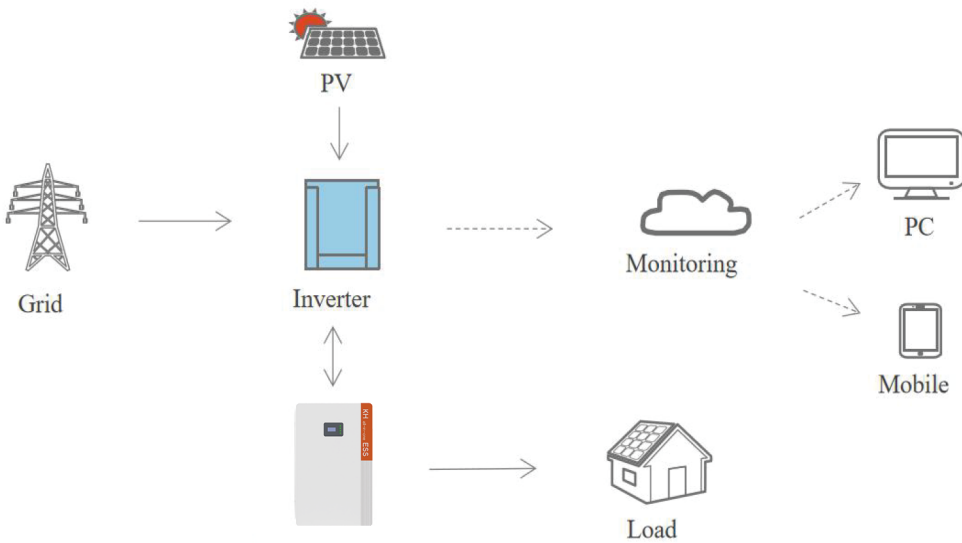

FEATURES

- 24-hour clean energy supplying
- 10 years designed lifespan
- Flexible design, easy to scale up
- Easy to wall mount
- Compact size and space saving


SPECIFICATIONS

Nominal Voltage	51.2V
Rated Capacity	100AH @0.5C to 42V
Stored energy	5120Wh
Chemistry	LiFePO4
Life Expectancy (years)	10 years @ 25° C
Charge Cut-off Voltage	58.4V
Discharge Cut-Off Voltage	41.6V
Internal Resistance	≤70.0 m Ω
Max. Continuous charge Current	100 A
Max. Continuous discharge Current	100 A
Cycle life@100%DOD	>2000 Cycles@100%DOD >4000 Cycles@80%DOD >7000 Cycles@50%DOD
Self-Discharge Rate	≤3%/month @ 25° C
Battery Pack Round-Trip Efficiency	Up to 98%
Approx. Weight	60 kg
Dimensions	L445mm×W259mm×H600mm
Series & Parallel Connection	Maxium 14 units in parallel Connection
Operating Temperature Range	
Charge	32°F (0°C) to 113°F (45°C)
Discharge	-4°F (-20°C) to 140°F (60°C)
Storage	-4°F (-20°C) to 140°F (60°C)
Installation	Wall-mounted
Humidity Conditions	10% to 90%
Cooling method	Natural cooling
Installation	Wall-mounted
Installation Altitude(above sea level)	≤2,000m
Certification	CELL: UN38.3, UL1642, CE BATTERY: UN38.3, CE
Communication with BMS	RS485/CAN
Monitoring parameters	System Voltage System Current Cell Voltage Cell temperature


HIGH FREQUENCY INVERTER PARAMETERS

High frequency inverter parameters	
Power	5000VA/5KW
DC input	48VDC/115A
AC output	230VAC,50/60Hz,22A
AC charger mode	
AC input	230VAC, 50/60Hz, 22A
DC output	54VDC (maximum 80A, default 30A)
AC output	230VAC.50/60Hz.22A
Solar charging mode	
Power	6KW
Maximum solar voltage	495VDC
MPPT voltage range	60-450VDC


ALL IN ONE POWERWALL **NEW DESIGN**

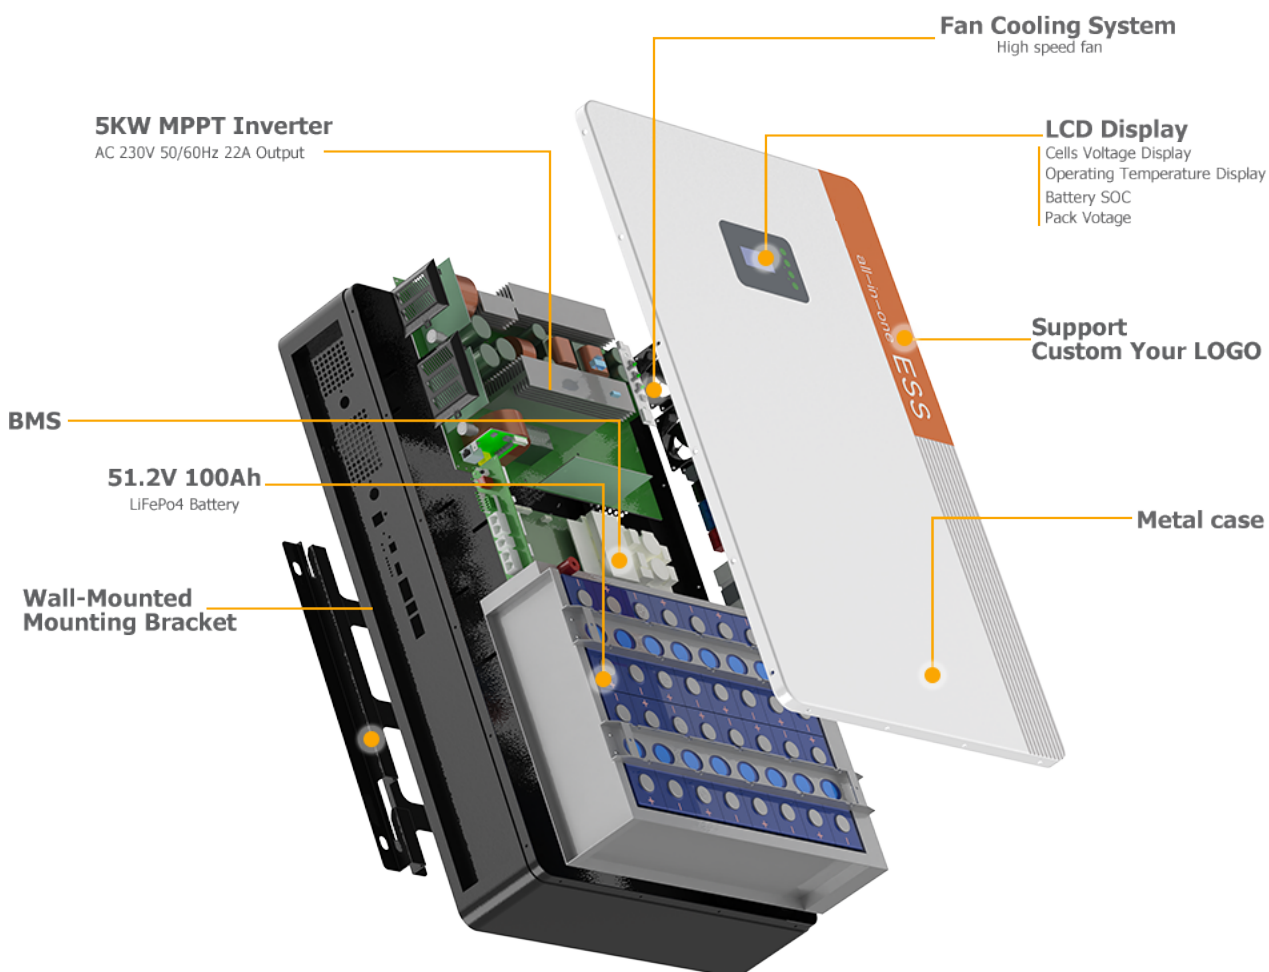


CHARACTERISTIC CURVE

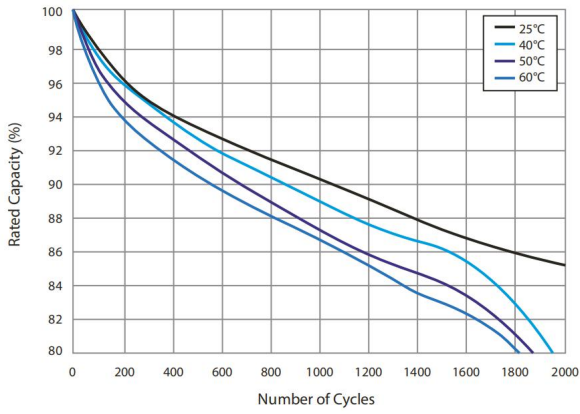


100% DOD Cycle Curves at Different Temperatures

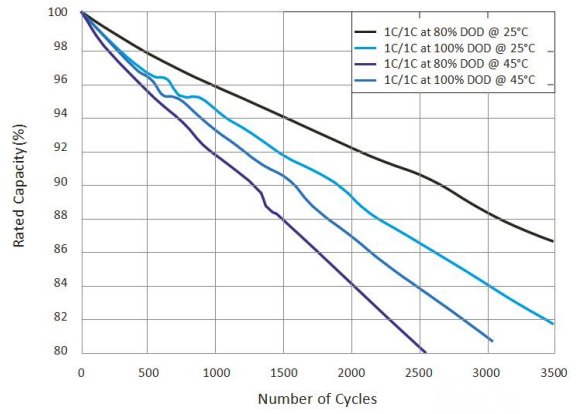


1C Cycle Curves at Different DOD & Temperatures

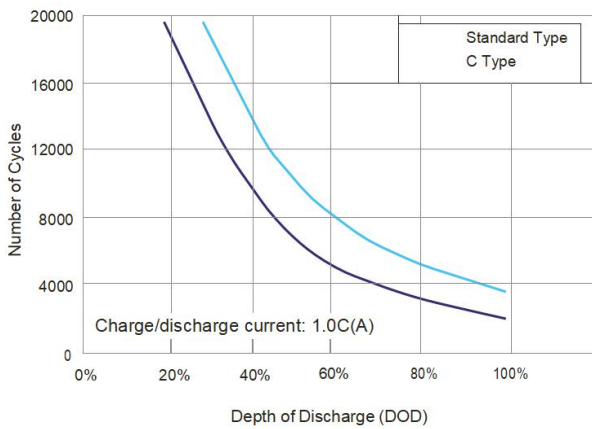


DOD in Relation to Cycle Life (25°C)

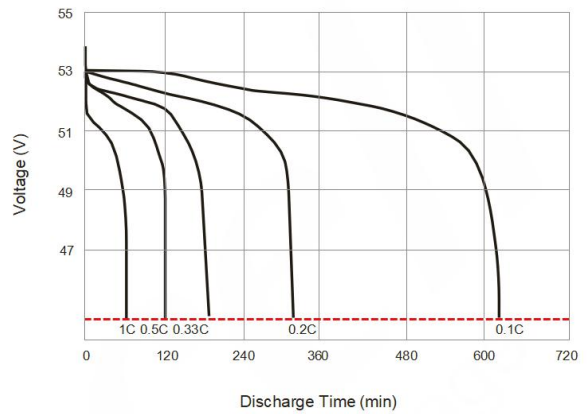

Discharge Time in Relation to Discharge Rate (25°C)

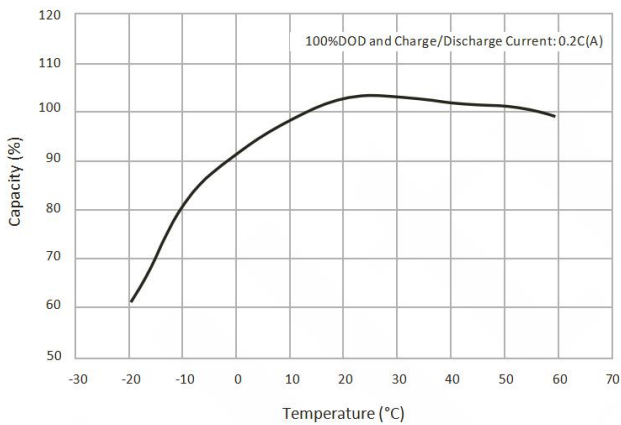

Temperature Effect in Relation to Battery Capacity

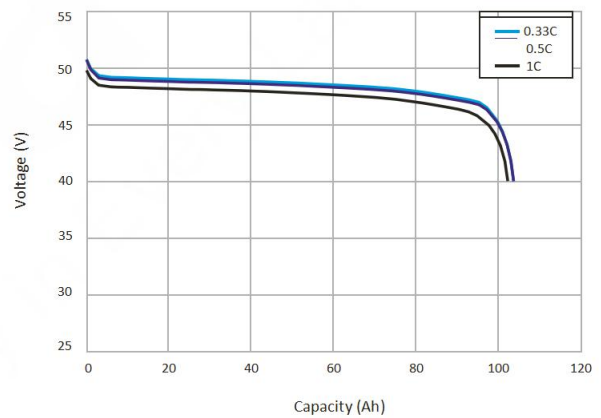

Discharge Capacity in Relation to Discharge Rate

Shenzhen Heyuxin Technology Co.,Ltd

2001, Building A, Zhongan Science Park, No. 117,
Huang Road, Xinshi Community, Dalang Street, Longhua District,
Shenzhen, Guangdong

Website: www.hyxinbattery.com
Email: contact@hyxinbattery.com

