

HYXinbattery 24v Series Battery Packs

Data Parameters HYX-24100R1

HYXinbattery 24V 100Ah LiFePO4 LITHIUM BATTERY

Crafted out of Lithium Iron Phosphate (LiFePO4) technology, this is a battery built to last. With 2,000+ recharge cycles (and up to 7,000 under ideal charging conditions) the 100 Ah provides 5 X the lifespan than your typical SLA battery. Ideal for industrial purposes where you need a long lifespan battery that charges quickly, or for outdoor uses like hiking or camping where weight is at a premium. Built in smart BMS, which can realize Bluetooth function and battery level display optional.

Optional:  **Bluetooth**
LCD Display



SPECIFICATIONS

Nominal Voltage	25.6V
Rated Capacity	100AH @0.2C to 19.2V
Stored energy	2560Wh
Cycle life@100%DOD	2000 Cycles
Approx. Weight	21 kg
Internal Resistance	≤20.0 mΩ
Max. Charge Current	100 A
Max. Discharge Current	200 A
Charge Cut-off Voltage	29.2V
Discharge Cut-Off Voltage	19.2V
Dimensions	L490mm × W170mm × H242mm
Series & Parallel Connection	Up to 4 batteries
Operating Temperature Range	
Charge	32°F (0°C) to 113°F (45°C)
Discharge	14°F (-10°C) to 140°F (60°C)
Recommended	59°F (15°C) to 95°F (35°C)
Self-Discharge Rate	≤3%/month
Life Expectancy (years)	15 years at one cycle per day
Self Discharge	Approx. 2% per month @ 20° C
Long Term Storage	Charge every 6 months
Short Circuit Protection	Automatically recover after removal of short
Terminal Type	Female Copper Insert M8 (M8/mm)



COMPLIED STANDARD

- ✓ IEC 62133
- ✓ UL 1642
- ✓ ISO9001
- ✓ ISO14001
- ✓ UN38.3

INTELLIGENT BMS FUNCTION





- Overcharge detection function
- Over discharge detection function
- Over current detection function
- Short detection function
- Temperature detection function
- Balance function

BLUETOOTH® ENABLED

Monitor the State of Charge (SoC), State of Health (SoH), current, capacity, temperature, number of cycles, and voltage levels of the battery and individual cells from APP.

APPLICATIONS

Medical Solar Wind Mobility Data Center Transport Sports & Recreation Utility

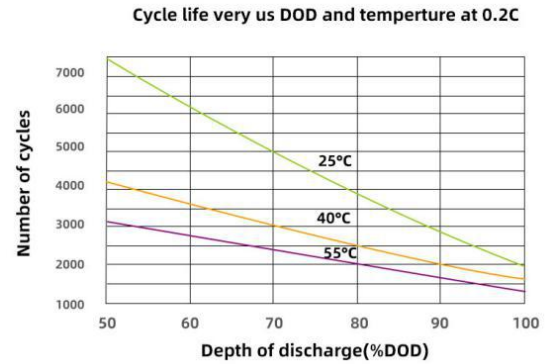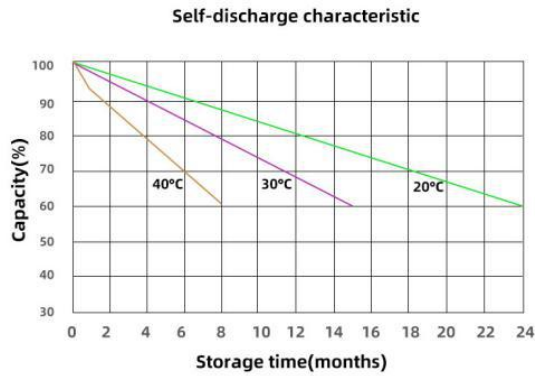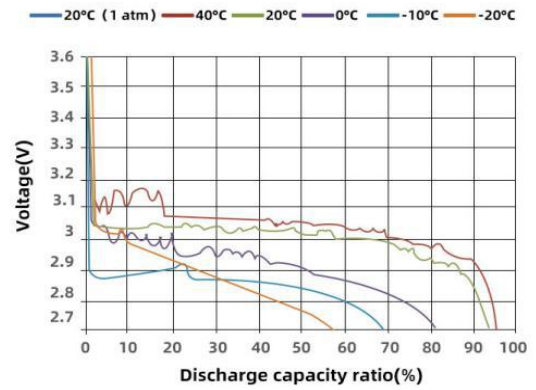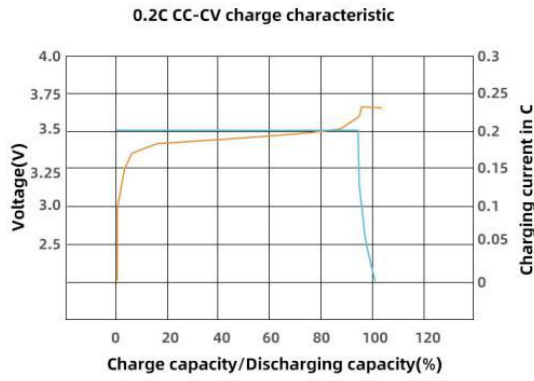

BENEFITS OF LITHIUM

Lithium offers several performance benefits versus its sealed lead acid (SLA) equivalent. A lithium battery's capacity is independent from the discharge rate and provides constant power throughout its discharge. The degradation of a lithium battery at a high temperature is significantly reduced in comparison to SLA. Lithium has ten times the cycle life as SLA at room temperature. Even at an elevated temperature, lithium still has increased cycle life over SLA at room temperature. Lastly, Lithium charging follows a similar charging profile as SLA, Constant Current Constant Voltage (CC/CV). However, lithium can be charged faster, without the need for a maintenance float charge.



Shenzhen Heyuxin Technology Co.,Ltd

2001, Building A, Zhongan Science Park, No. 117, Huaning Road, Xinshi Community, Dalang Street, Longhua District, Shenzhen, Guangdong

Website: www.hyxinbattery.com
Email: contact@hyxinbattery.com

