

# **EVE POWER Co., Ltd**

## **Product Specification**

File No : LF100MA-50160  
Version : Rf  
Effective Date : 2021-07-01

Product name : LFP Power Battery  
Model name : LF100MA  
Specification : 3.2V 100Ah  
Draft : Ming Wang  
Checked : Yong Zhang  
Approved : Daniel Yuan  
Customer Approved :

Mail : [sales@evebattery.com](mailto:sales@evebattery.com)

Address : No .68 Jingnan Avenue,Duodao District, Jingmen High-tech Zone, Jingmen City, Hubei Province.

**History of specification**

Date	Contents	Remarks
2021-07-01	First issue	Rf

## Contents

1. Scope .....	1
2. Description and Model .....	1
3. General Technical Parameter .....	1
4. Test conditions .....	2
5. Main Performance .....	3
6. Transportation .....	4
7. Storage .....	5
8. Points for attention.....	5
Appendix I: Two-dimensional graphs of Battery.....	6
Appendix II: Battery coding rules.....	7
Appendix III: Photos of battery appearance .....	8

## 1. Scope

This specification is applied to Rechargeable LFP Power Battery with aluminum shell (3.2V 100Ah) manufactured by EVE Power Co., Ltd., in which the description and model, main performance, test conditions and precautions of the product are included. The product can be applied for Vehicle power supply, Storage system, etc.

## 2. Description and Model

2.1 Description: LFP Li-ion Power Battery with aluminum shell.

2.2 Model: LF100MA

## 3. General Technical Parameter

#	Item		Parameter	Remark
1	Nominal Capacity		100.0 Ah	(25±2)°C, Standard charge and discharge
2	Typical Voltage		3.2V	
3	AC Impedance Resistance(1KHz)		≤0.5mΩ	
4	Standard charge and discharge	Charge / discharge current	0.5C/0.5C	(25±2)°C
		Cut off voltage of charge / discharge	3.65V/2.5V	
5	Maximum charge / discharge current	Continuous charge / discharge	1C/1C	According to continuous / pulse charge and discharge ammeters
		Pulse charge / discharge (30s)	2C/2C	
6	Recommended scope of SOC		10% ~90%	N.A.
7	Charging Temperature		0°C~55°C	According to continuous / pulse charge and discharge ammeters
8	Discharging Temperature		-20°C~55°C	

#	Item	Parameter	Remark
9	Storage temperature	Short term (within 1 month)	-20°C~45°C
		Long term (within 1 year)	0°C~35°C
10	Storage humidity range	<95%	N.A.
11	Self-discharge rate per month	≤3%/month	
Temperature: (25±2)°C, Storage scope of SOC: 30%~50%SOC			
12	Dimension	Hem width	160 ±0.8mm
13		Width of non hem	160 ±0.5mm
14		Thickness (30%-40% SOC 200kgf)	50.1 ±0.5mm
15		High (total)	118.5 ±0.5mm
16		High (subject)	115.7 ±0.5mm
17		Tabs Distance	97.0±0.3mm
18	Battery weight	1.92±0.1kg	Refer to Appendix I
19	Encapsulation mode	U-shaped capsule	

## 4. Test conditions

### 4.1 Test environment conditions

Temperature: 25±2°C

Relative humidity (RH): 15~90%

Atmospheric condition: 86KPa~106KPa

### 4.2 Standard Charge

The standard charge means charging the cell with charge current 0.5C (A) and constant voltage 3.65V at (25±2) °C, 0.05C (A) cutoff.

### 4.3 Standard Discharge

The standard discharge means discharging the cell with discharge current 0.5C (A) and cutoff voltage 2.5V at (25±2) °C.

## 5. Main Performance

### 5.1 Electrical performance

No.	Item	Requirements	Measuring Procedure
1	Rate discharge performance at 25°C	Discharge capacity/nominal capacity×100% A) 0.1C A≥100% B) 0.33C A≥100% C) 0.5CA ≥100% D) 1.0CA ≥98%	After standard charge and 0.5h rest, discharge to 2.5V cutoff with the current of 0.1C (A), 0.33C (A), 0.5 C(A), 1.0C(A), respectively. If the discharge capacity fails to meet the technical requirements, this test is allowed to be repeated three times
2	Discharge performance at different temperature	Discharge capacity/nominal capacity×100% A) 55°C 1C(A)≥95% B) -20°C 1C(A)≥70%	A) after standard charge and 4h rest at 55±2°C, discharge to 2.5V cutoff with the current of 1.0C(A); B) after standard charge and 4h rest at -20°C±2°C, discharge to 2.0V cutoff with the current of 1C(A).
3	The capacity retention and recovery at 25°C	Capacity Retention≥95% Capacity Recovery≥97%	Measure the initial capacity and state of the battery, after standard charge and stored for 28 days, discharge to 2.5V cutoff with the current of 0.5C (A) and 05h rest, calculate the remaining capacity, the retention can be expressed as a percentage of nominal capacity. After standard charged and 0.5h rest, calculate the discharging capacity (Ah), the recovery can be expressed as a percentage of nominal capacity. The recovery is measured with discharge current 0.5CA with 2.5V cut-off at (25±2) °C
4	cycle life at 25°C	≥2000 cycle @0.5C/0.5C	Under the 200kgf clamp, after standard charged and 0.5h rest, discharge to 2.5V cutoff with the current of 0.5C (A) at (25±2) °C, and then start the next cycle, end with the capacity decreasing to 80% of the initial capacity. The number of cycles is defined as the cycle life of the battery.
5	cycle life at 35°C	≥1600 cycle @0.5C/0.5C	Under the 200kgf clamp, after standard charged and 0.5h rest, discharge to 2.5V cutoff with the current of 0.5 C (A) at (35±2) °C, and then start the next cycle, end with the capacity decreasing to 80% of the initial capacity. The number of cycles is defined as the cycle life of the battery.

6	cycle life at 45°C	≥1000 cycle @0.5C/0.5C	Under the 200kgf clamp, after standard charged and 0.5h rest, discharge to 2.5V cutoff with the current of 0.5 C (A) at (45±2) °C, and then start the next cycle, end with the capacity decreasing to 80% of the initial capacity. The number of cycles is defined as the cycle life of the battery.
7	End of life management	capacity/nominal capacity <70%	During the use of the battery, the battery shall be stopped when the end of life regulations are exceeded.

## 5.2 Safety performance

No.	Item	Requirements	Measuring Procedure
1	Over Discharge	No fire、No explosion	Reference: GB / T 36276-2018 《Lithium ion battery for electrical energy storage》
2	Over Charging	No fire、No explosion	
3	Short-Circuit Test	No fire、No explosion	
4	Drop Test	No fire、No explosion	
5	Heating	No fire、No explosion	
6	Extrusion Test	No fire、No explosion	
7	Low pressure test	No fire、No explosion、 No leakage	
8	Thermal runaway	No fire、No explosion	

## 6. Transportation

Battery for shipping should be packed in boxes with the State of charge (30%~50%SOC). The Violent vibration, impact extrusion, sun and rain should be prevented during shipping.

## 7. Storage


Batteries should be stored (more than 1 month) indoor with a dry and clean environment at 0 °C~35 °C. The battery should be charged and discharged every 6 months. The SOC for storage is between 30% ~ 50%.

## 8. Points for attention


1. When the battery is charged and discharged, the conditions for monitoring and protecting the battery voltage, current and temperature shall be ensured.
2. Please keep the battery away from the heat source, fire source and other corrosive environments such as heating, strong acid and strong alkali.
3. Do not short circuit the battery or install it with incorrect polarity at any time, otherwise it can cause serious damage to the battery and cause danger.
4. Do not mix batteries of different models or manufacturers.
5. Do not use external force to make the battery fall, impact or puncture. Do not disassemble the battery or change the external structure.
6. When the battery is not used for a long time, please keep the battery in the state of 30%-50% SOC, and avoid the environment of strong direct sunlight or high temperature and humidity.
7. When operating the battery, it is necessary to wear rubber gloves and other protective devices.
8. In case of leakage, smoke or damage of battery, please stop using immediately and contact our company for handling.



**Appendix I: Two-dimensional graphs of Battery:**

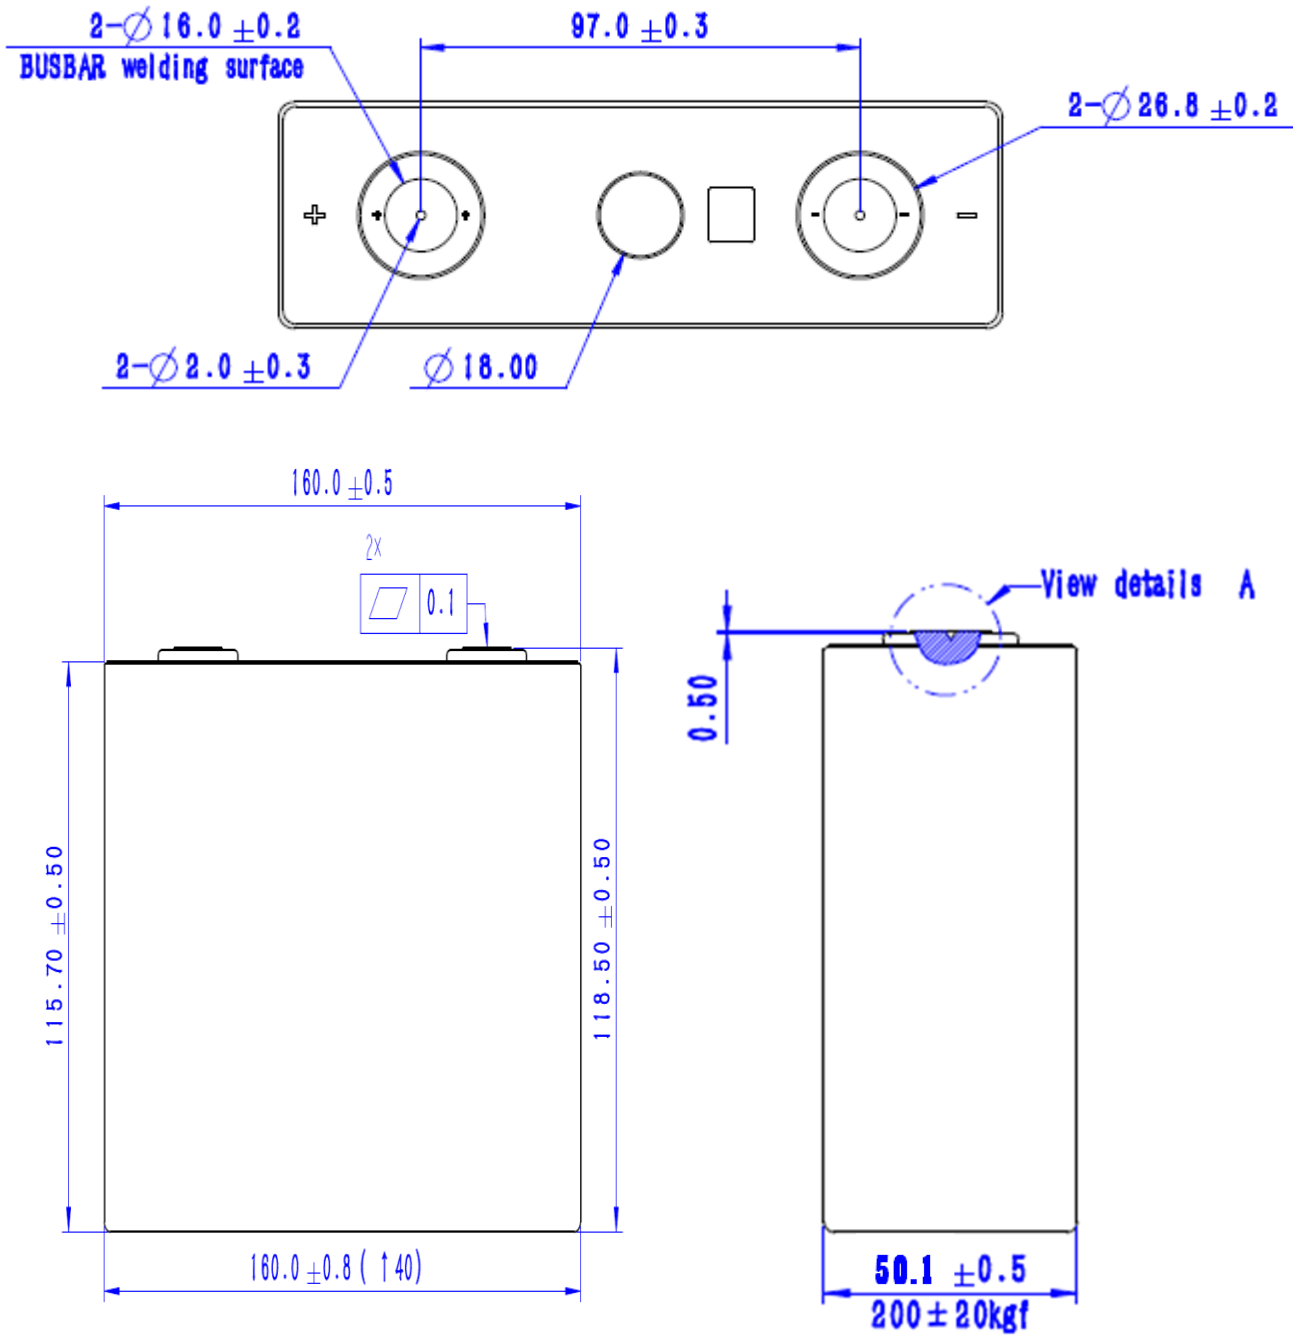

**Appendix II: Battery coding rules:**

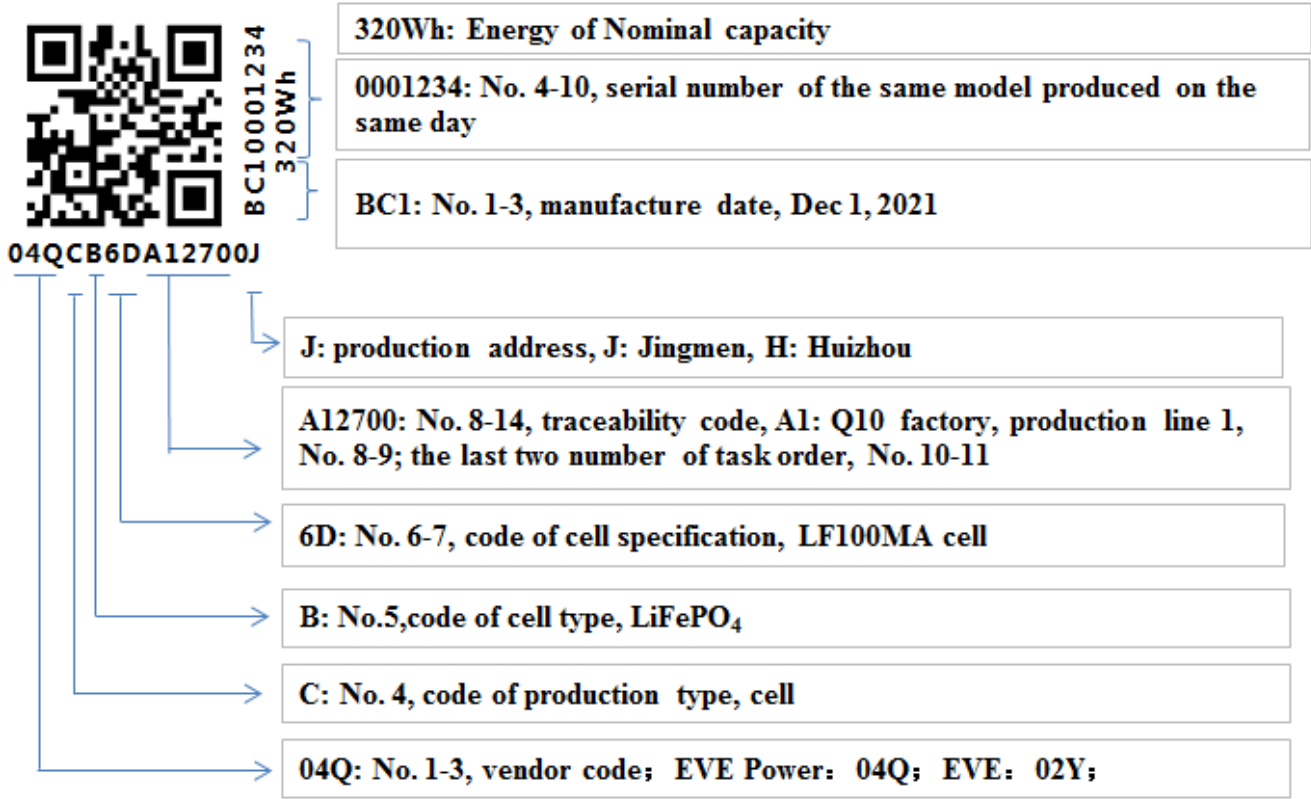

**Appendix III: photos of battery appearance:**

