



## HyXin 12V 6Ah LiFePO4 Lithium Battery SC series - Series Connection Capable



Support 4 units In series

Crafted out of Lithium Iron Phosphate (LiFePO4) technology, this is a battery built to last. With 2,000+ recharge cycles (and up to 7,000 under ideal charging conditions) the 6 Ah provides 5 x the lifespan than your typical SLA battery. Combine 2 for 24 Volts or 4 for a 48 Volt system. ideal for industrial purposes where you need a long lifespan battery that charges quickly, or for outdoor uses like hiking or camping where weight is at a premium.



Nominal Voltage	12.8V
Rated Capacity	6AH @0.5C to 9.6V
Stored energy	76.8Wh
Cycle life@100%DOD	2000 Cycles
Approx. Weight	0.8kg
Internal Resistance	≤80.0 m Ω
Max. Charge Current	3 A
Max. Discharge Current	6 A
Charge Cut-off Voltage	15.2V
Discharge Cut-Off Voltage	9.6V
Dimensions	L151mm × W65mm × H94mm
Series & Parallel Connection	Up to 4 batteries
Operating Temperature Range	
Charge	32°F (0°C) to 113°F (45°C)
Discharge	-4°F (-20°C) to 140°F (60°C)
Recommended	59°F (15°C) to 95°F (35°C)
Self-Discharge Rate	≤3%/month
Life Expectancy (years)	10 years @25° C in 80%DOD
Self Discharge	Approx. 2% per month @ 25° C
Long Term Storage	Charge every 6 months
Short Circuit Protection	Automatically recover after removal of short
Terminal Type	Outside F2 terminal

### COMPLIED STANDARD


- ✓ IEC 62133
- ✓ UL 1642
- ✓ ISO9001
- ✓ ISO14001
- ✓ UN38.3

### INTELLIGENT BMS FUNCTION

- Overcharge detection function
- Over discharge detection function
- Over current detection function
- Short detection function
- Temperature detection function
- Balance function

### SERIES CONNECTION CAPABLE


The SC series allows for up to 4 batteries connected in series or 10 in parallel, but not concurrently. The batteries must all be matched at voltage levels, capacity, state of charge, date of manufacturing, and chemistry.

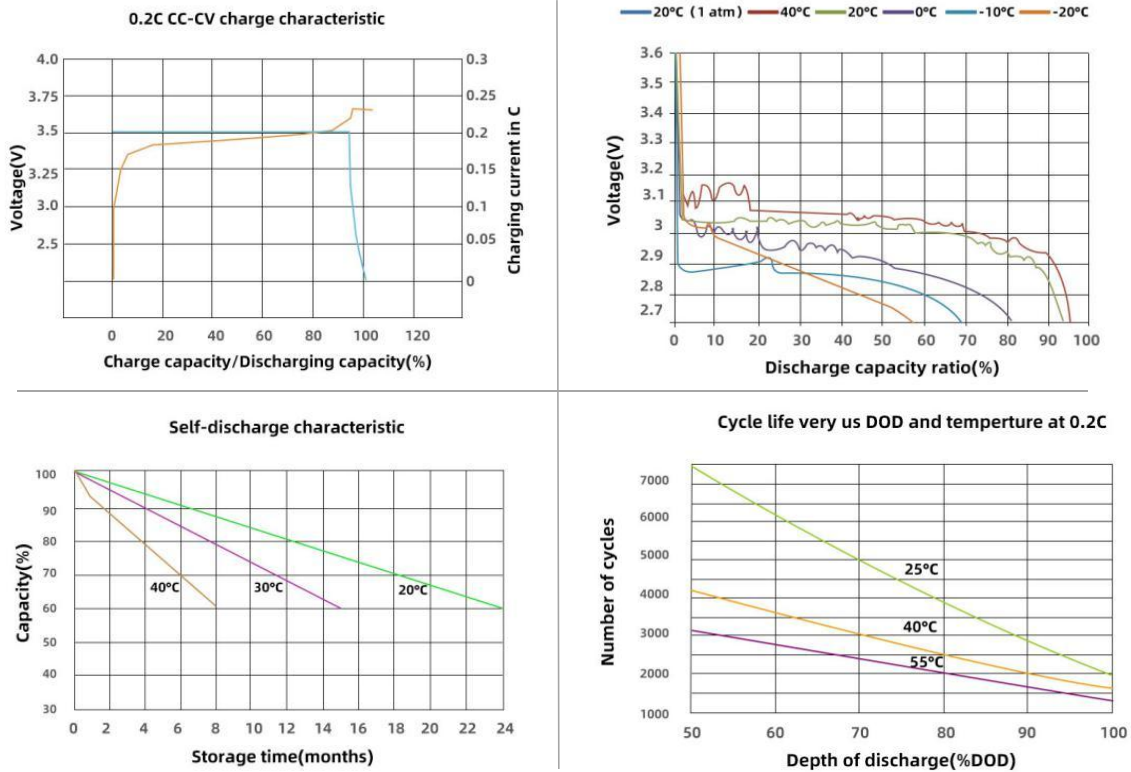

**BENEFITS OF LITHIUM**

Lithium offers several performance benefits versus its sealed lead acid (SLA) equivalent. A lithium battery's capacity is independent from the discharge rate and provides constant power throughout its discharge. The degradation of a lithium battery at a high temperature is significantly reduced in comparison to SLA. Lithium has ten times the cycle life as SLA at room temperature. Even at an elevated temperature, lithium still has increased cycle life over SLA at room temperature. Lastly, Lithium charging follows a similar charging profile as SLA, Constant Current Constant Voltage (CC/CV). However, lithium can be charged faster, without the need for a maintenance float charge.

**BATTERY DIMENSIONS**

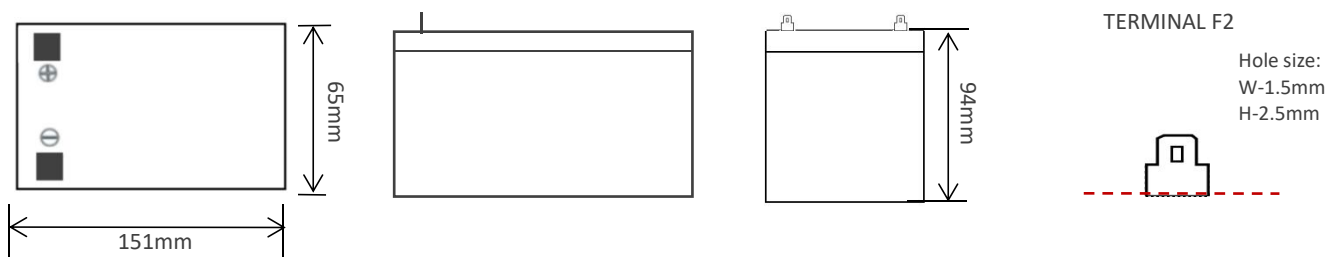

**Shenzhen Heyuxin Technology Co.,Ltd**

2001, Building A, Zhongan Science Park, Longhua District, Shenzhen, China

Tel:+86 19842790712

Website: www.hyxinbattery.com

Email: contact@hyxinbattery.com

